



# MT 12

Cylindrical design

Through bolts free

Blank firing protection

Autolube system

Underwater work

Minimum maintenance


Longer product lifetime

Model		MT 12
Operating weight	kg	1250
Excavator	tn	15-23
Operating flow	l/min	90-120
Operating pressure	bar	150-170
Blow frequency	bpm	400-800
Diameter of tool	mm	120
Tool height	mm	1.100
Total height	mm	2.100
Blank firing protection System		S
Autolube system		S
Underwater work		S

TABE has a unique testing laboratory that tests and guarantees the quality, performance and resistance of all its products before going on the market.



1. Through bolts free.
2. Solid housing with high density isolation.
3. Energy Recovery, Hybrid technology.
4. Underwater working system.
5. Auto lube system.
6. Two moving parts only.
7. Double tool retainer.
8. Reinforced housing with wear-resistant material.
9. Wide range of tools for different applications.

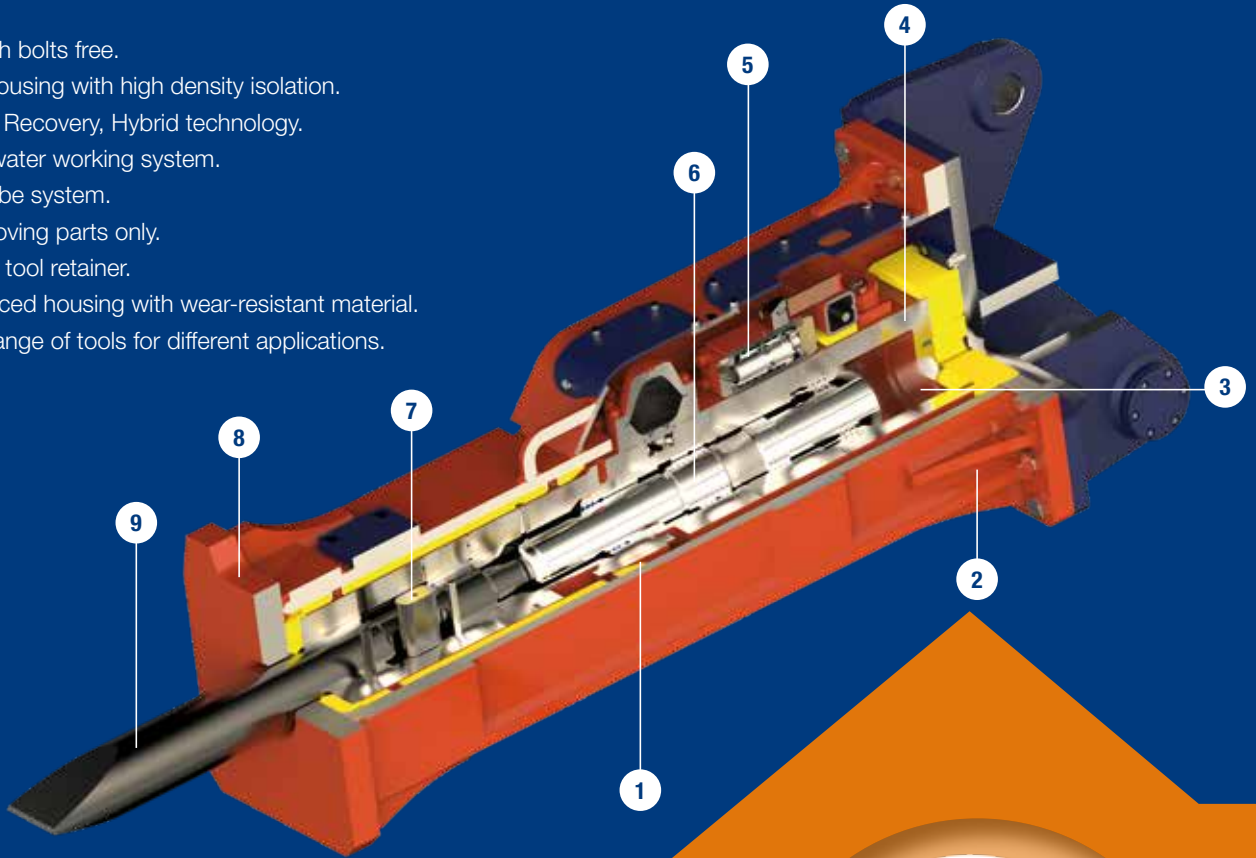

# Solutions for each application

MOIL TOOL



CHISEL TOOL




POINT TOOL



BLUNT TOOL



WIDE CHISEL  
TOOL



ELEPHANT  
TOOL



POST HOLE  
DRIVER



RAMMING  
TOOL



BETASYSTEM



DUST PROTECTION  
RING



Bekolarra 8,  
01010 Vitoria-Gasteiz (España)  
+34 945 24 72 50  
+34 945 22 41 77  
tabe@tabe-hammers.com

[www.tabe-hammers.com](http://www.tabe-hammers.com)