



MT 195

Cylindrical design

Monoblock structure

Through bolts free

Blank firing protection

Minimum maintenance

Longer product lifetime


Model	MT 195	
Operating weight	kg	200
Excavator	tn	3-5
Operating flow	l/min	35-50
Operating pressure	bar	120-140
Blow frequency	bpm	875-1.200
Diameter of tool	mm	65
Tool height	mm	610
Total height	mm	1.145
Blank firing protection System	S	

TABE has a unique testing laboratory that tests and guarantees the quality, performance and resistance of all its products before going on the market.

TABE


We build solutions

1. Through bolts free.
2. Cylindrical design with high hardness casting body.
3. Energy recovery, hybrid technology.
4. Optional: underwater working system.
5. Greasing system.
6. Only two parts in movement.
7. Wide range of tools for different applications.

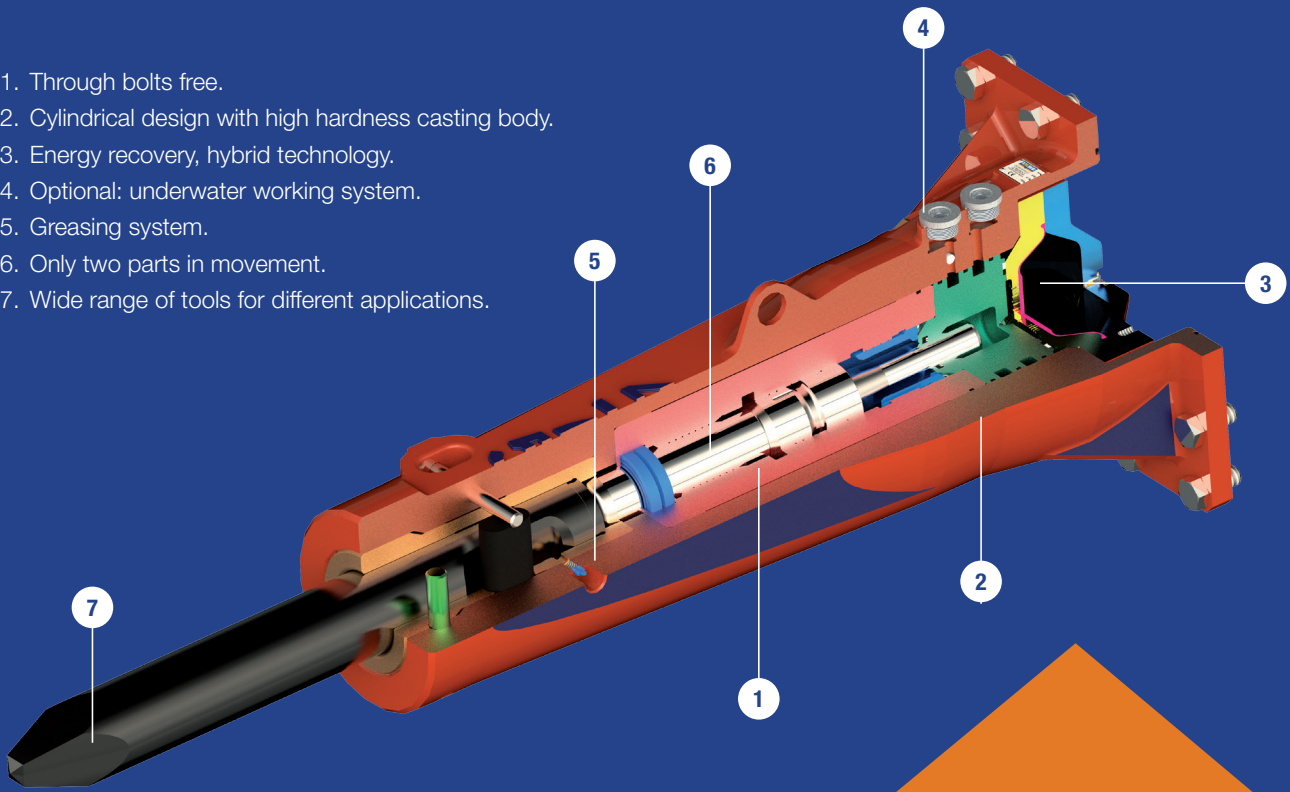

Solutions for each application


MOIL TOOL



CHISEL TOOL




POINT TOOL



BLUNT TOOL



WIDE CHISEL TOOL



ELEPHANT TOOL



POST HOLE DRIVER



RAMMING TOOL



DUST PROTECTION RING



Bekolarra 8,
01010 Vitoria-Gasteiz (España)
+34 945 24 72 50
+34 945 22 41 77
tabe@tabe-hammers.com

www.tabe-hammers.com